

USB AUDIO INTERFACE URX44V URX44 URX22 Block Diagram

Block Diagram (URX44V, URX44)

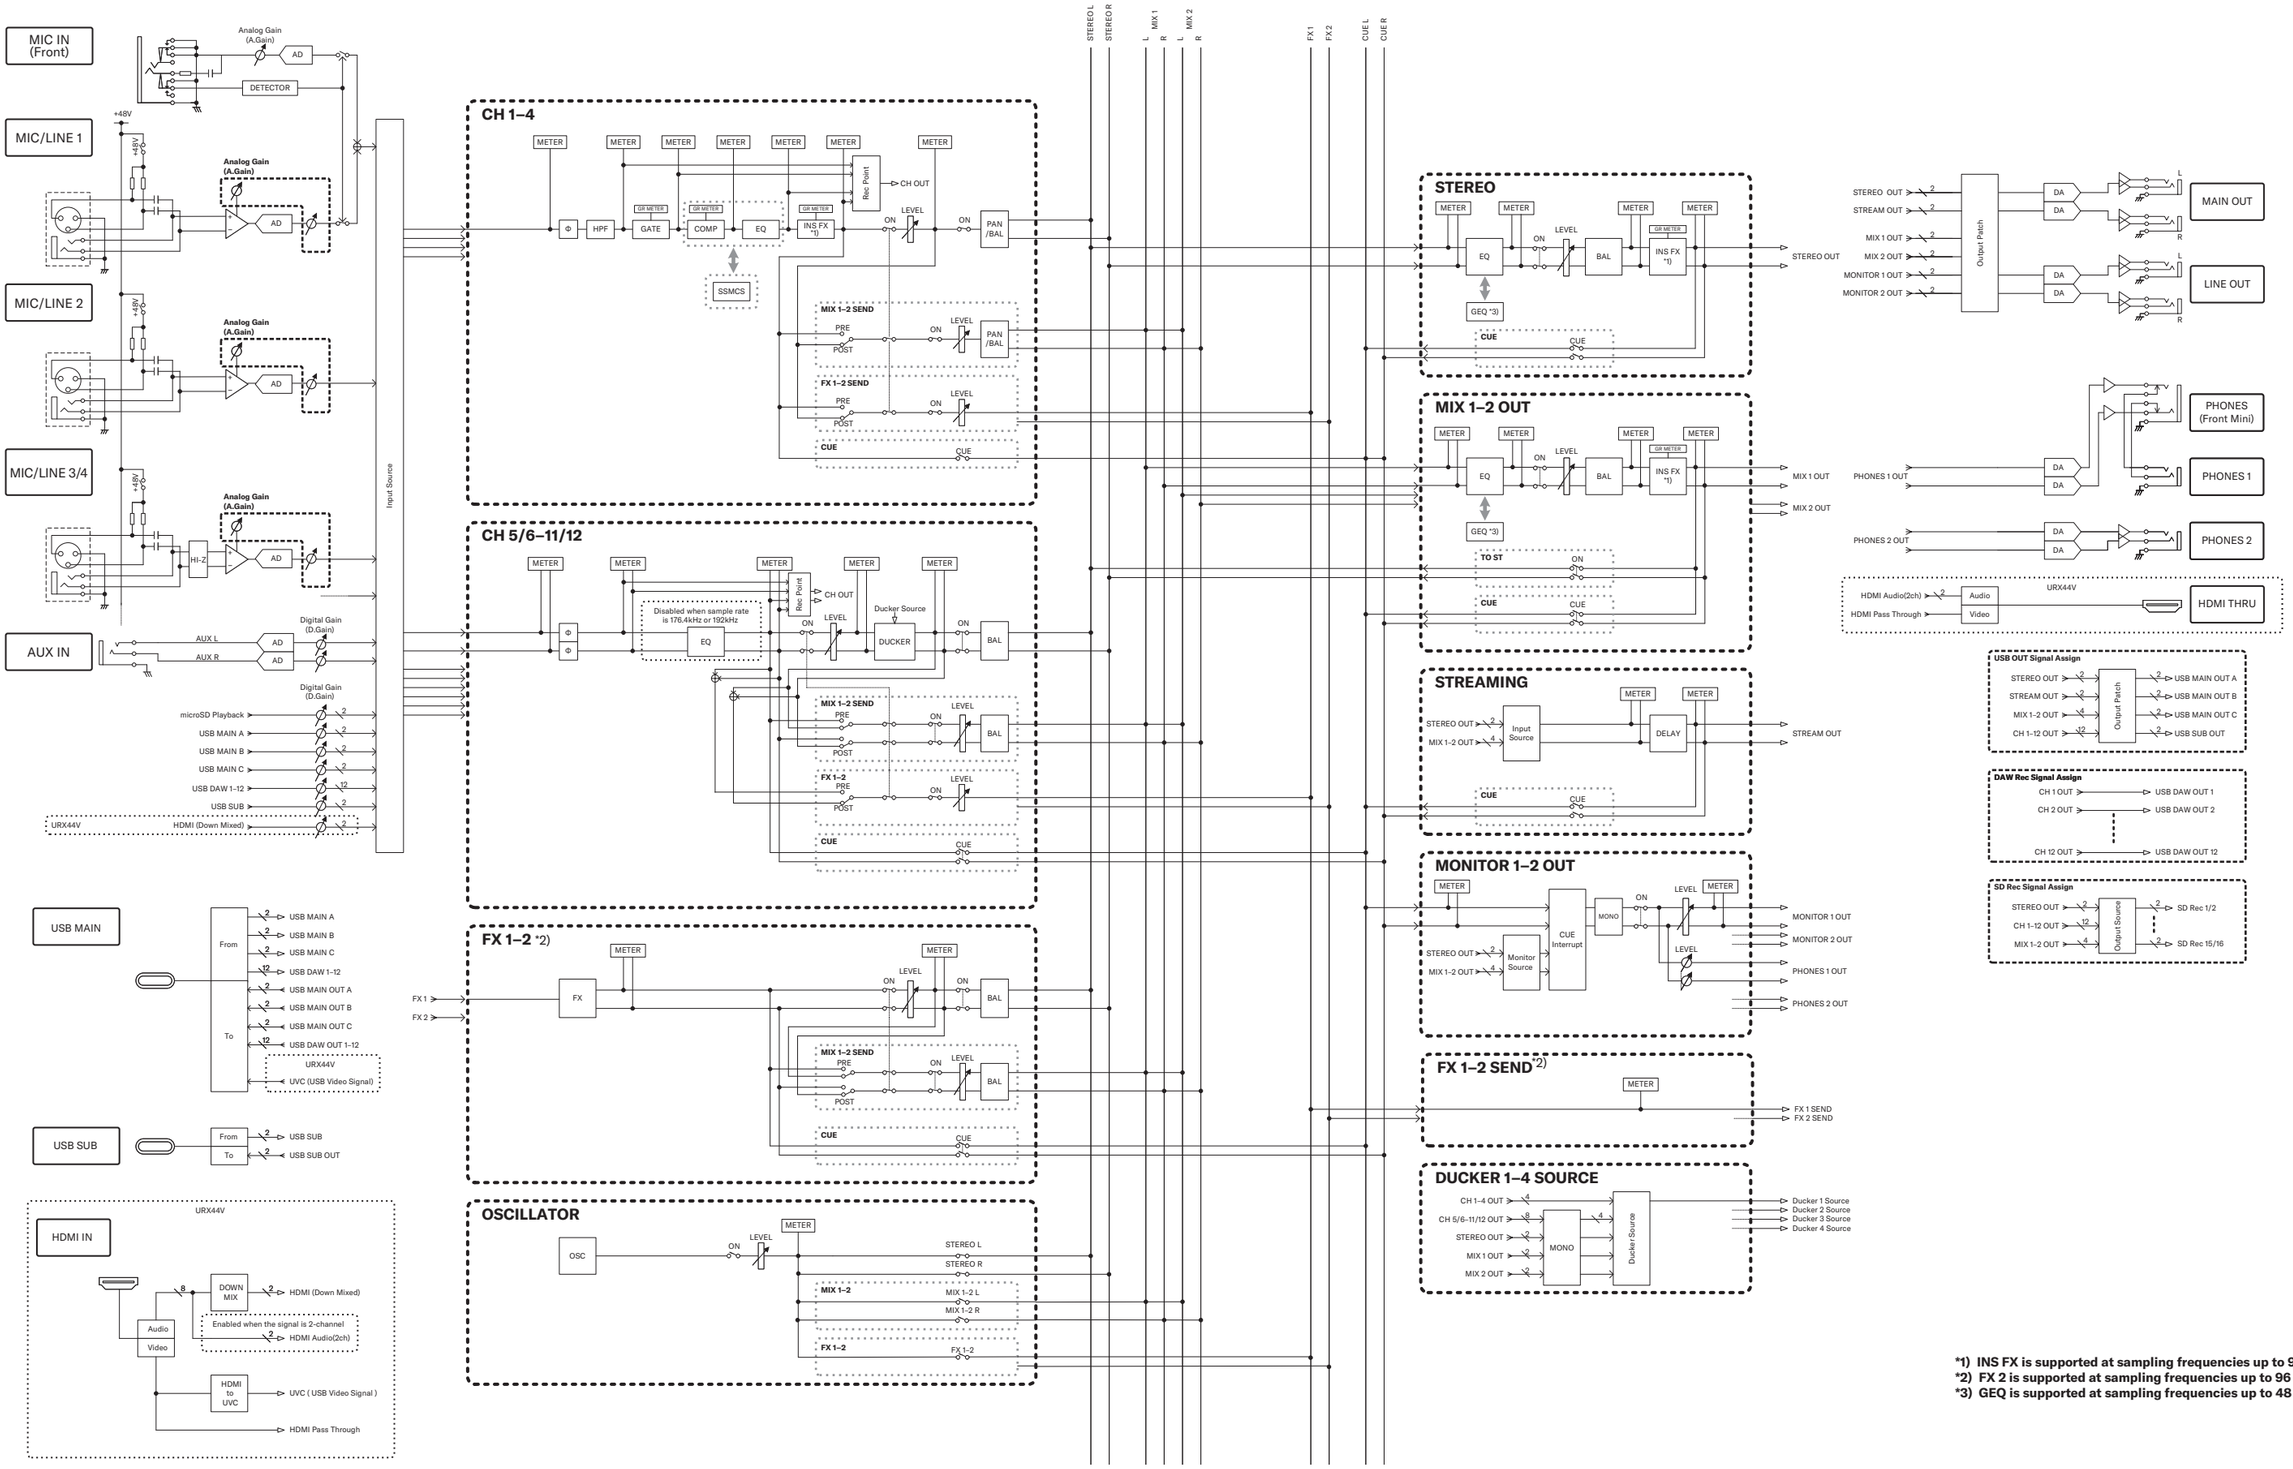


***1) INS FX is supported at sampling frequencies up to 96 kHz.**
***2) FX 2 is supported at sampling frequencies up to 96 kHz.**
***3) GEQ is supported at sampling frequencies up to 48 kHz.**

DAW Integration Block Diagram (URX44V, URX44)

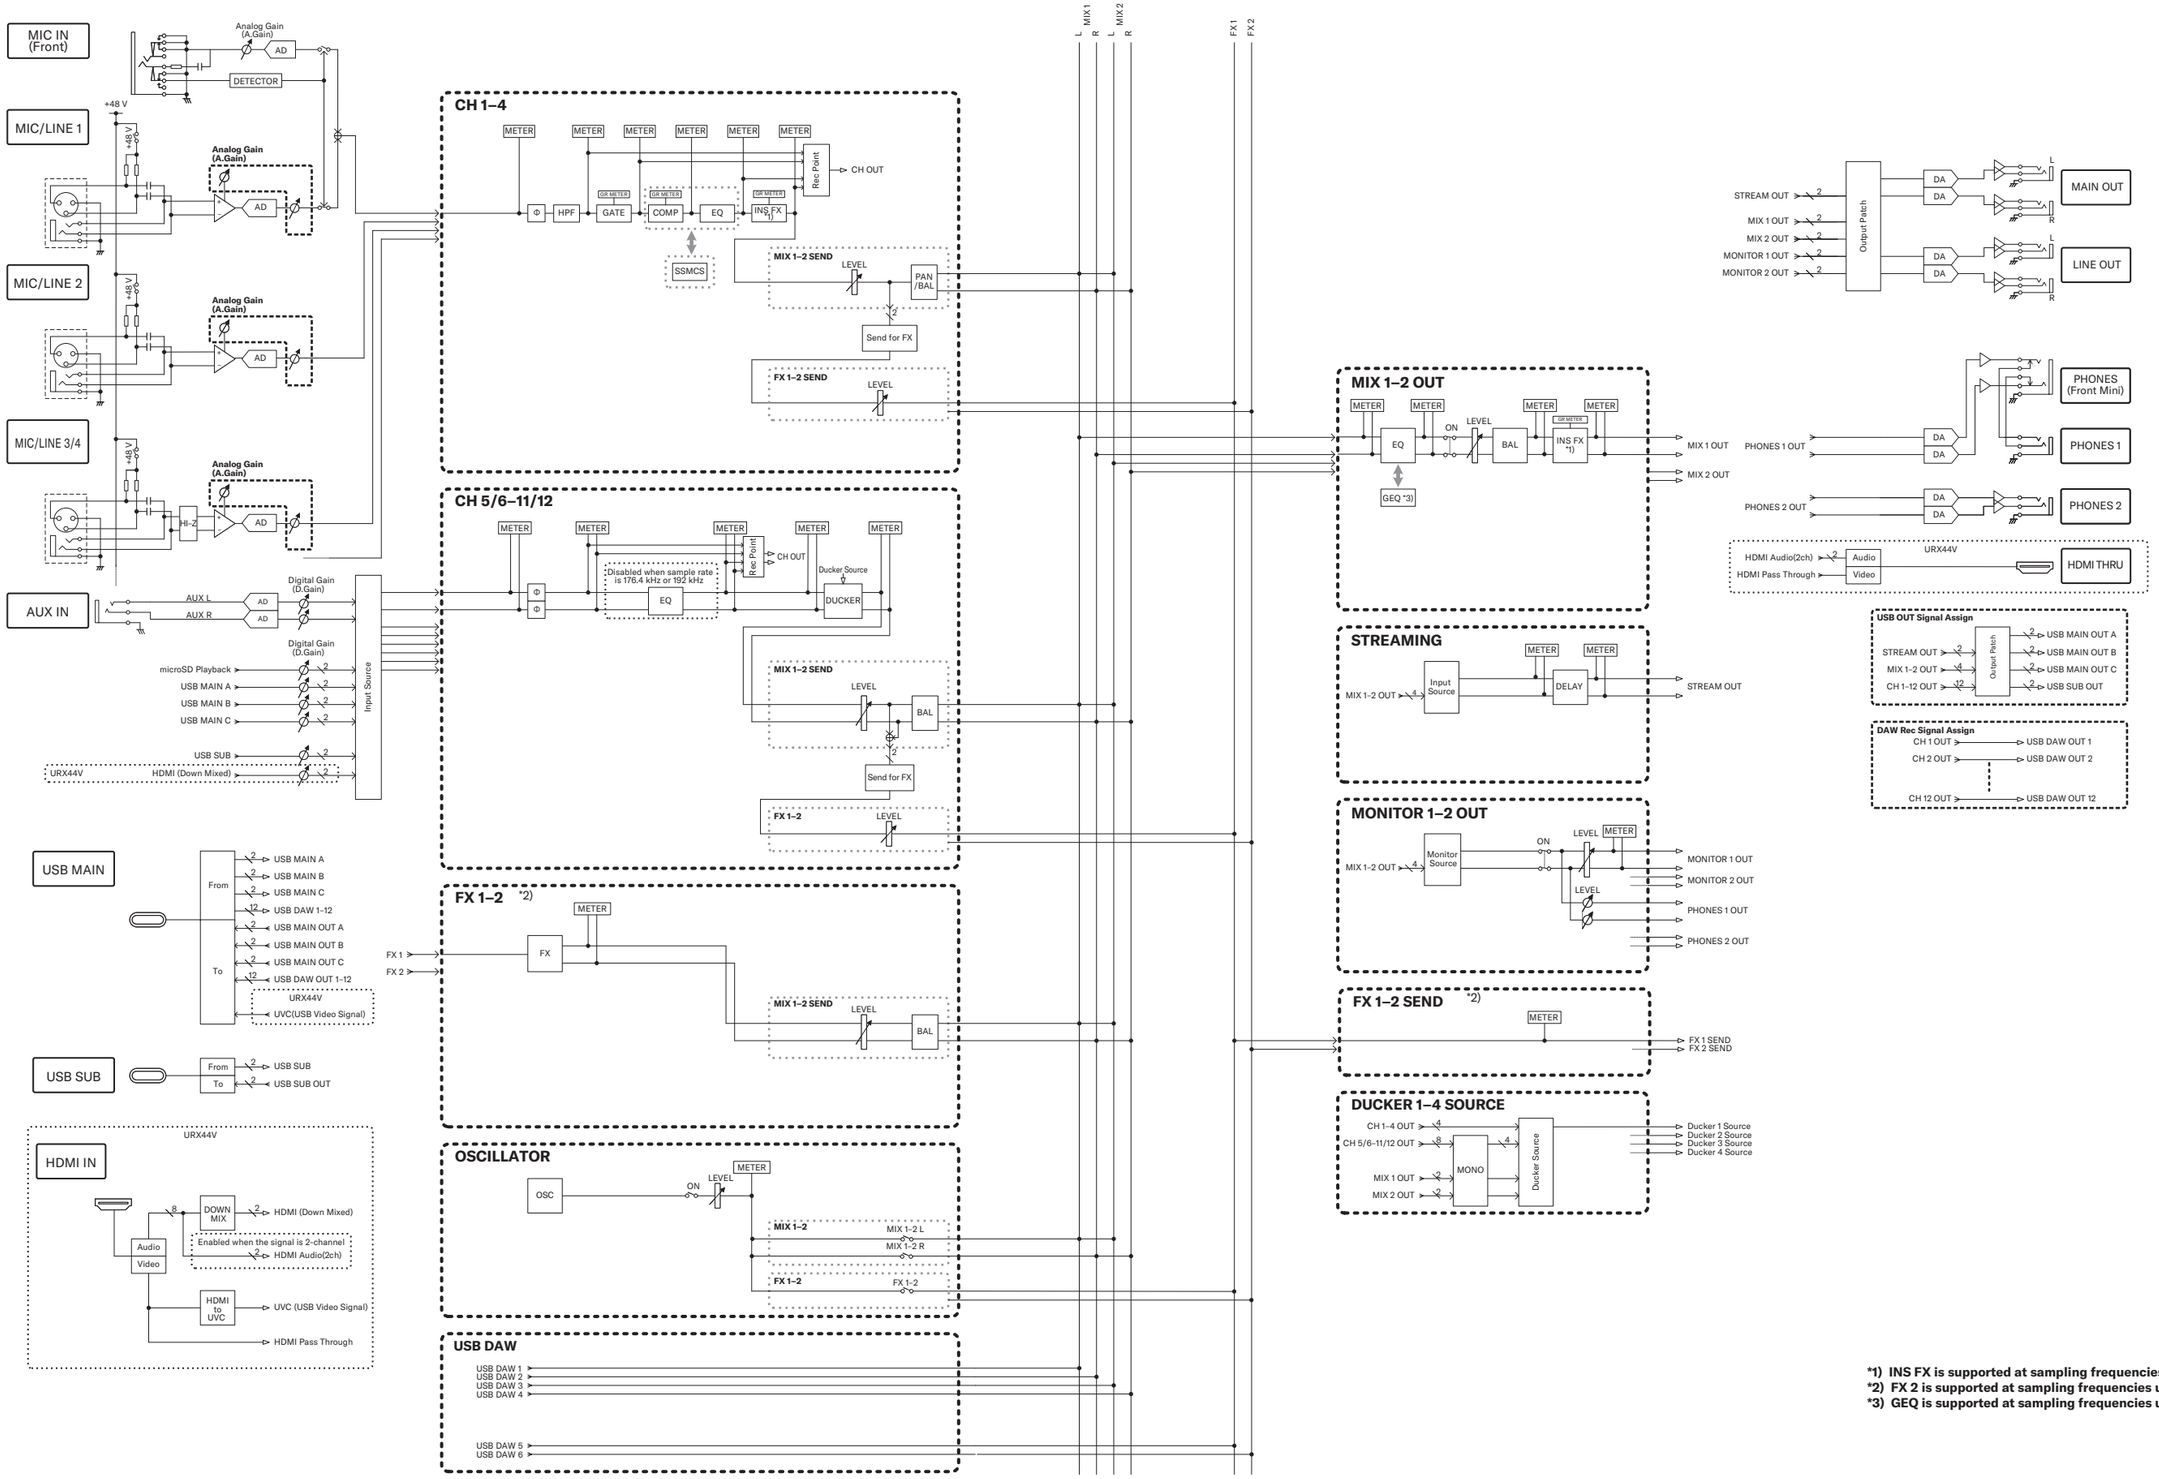


***1) INS FX is supported at sampling frequencies up to 96 kHz.**
***2) FX 2 is supported at sampling frequencies up to 96 kHz.**
***3) GEQ is supported at sampling frequencies up to 48 kHz.**

Block Diagram (URX22)

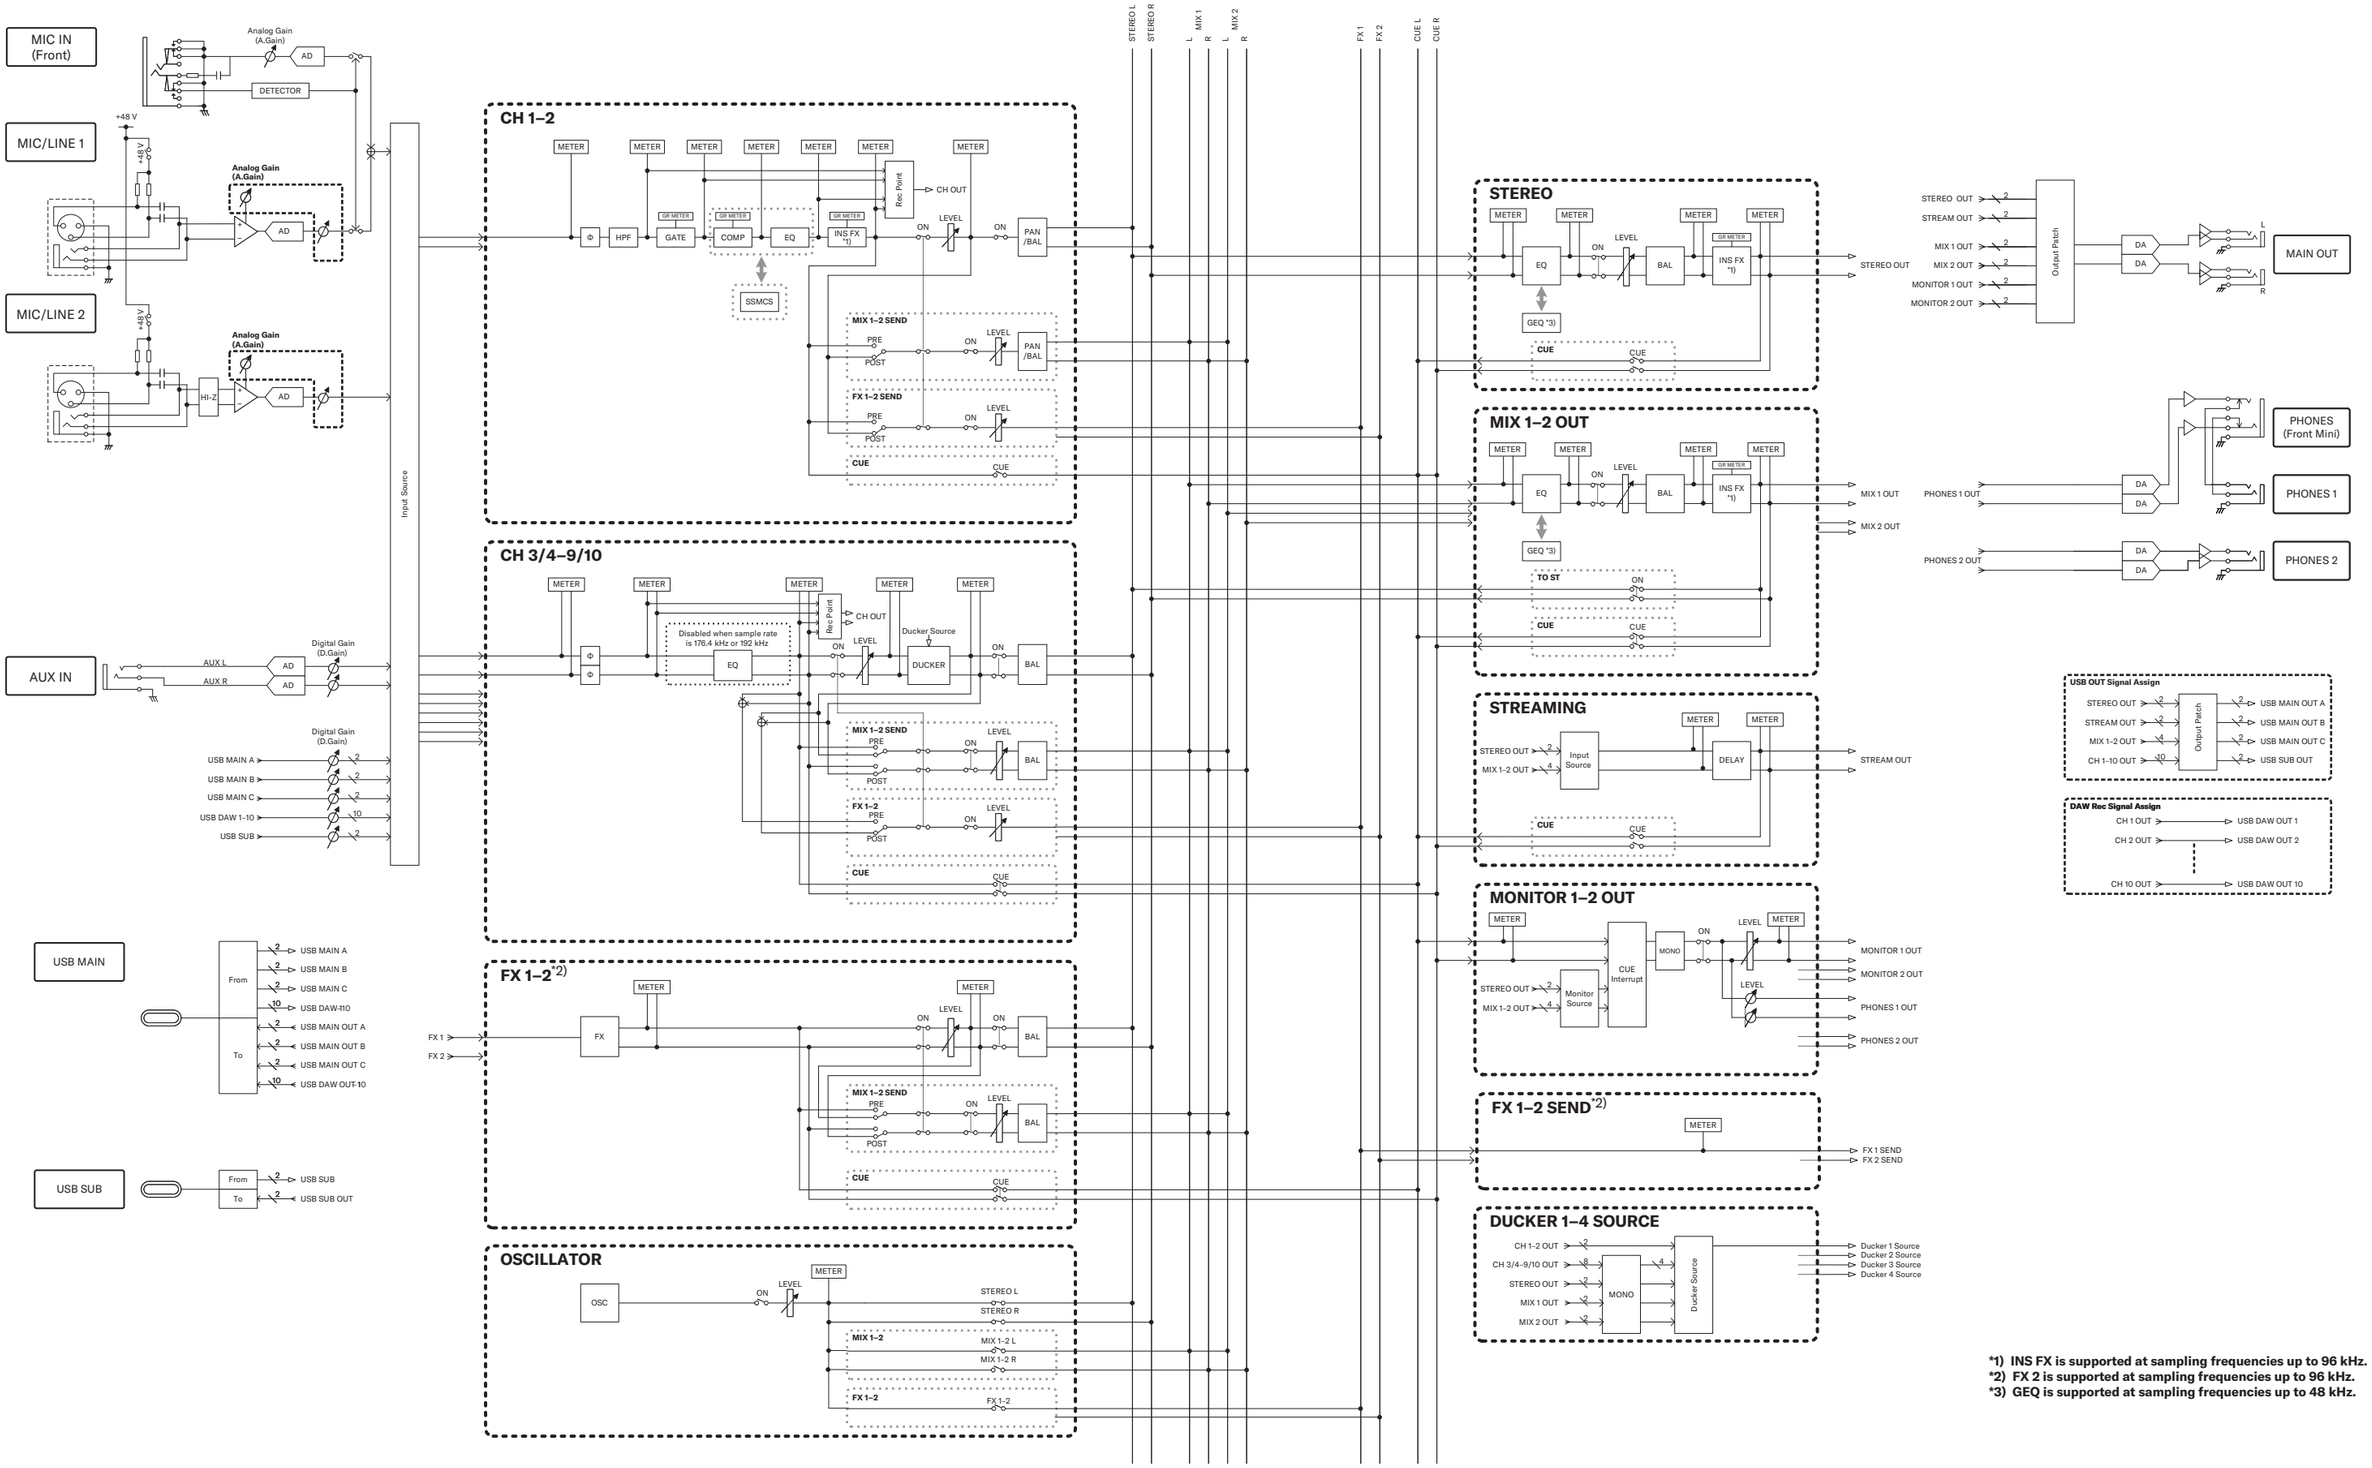

***1) INS FX is supported at sampling frequencies up to 96 kHz.**
***2) FX 2 is supported at sampling frequencies up to 96 kHz.**
***3) GEQ is supported at sampling frequencies up to 48 kHz.**

DAW Integration Block Diagram (URX22)

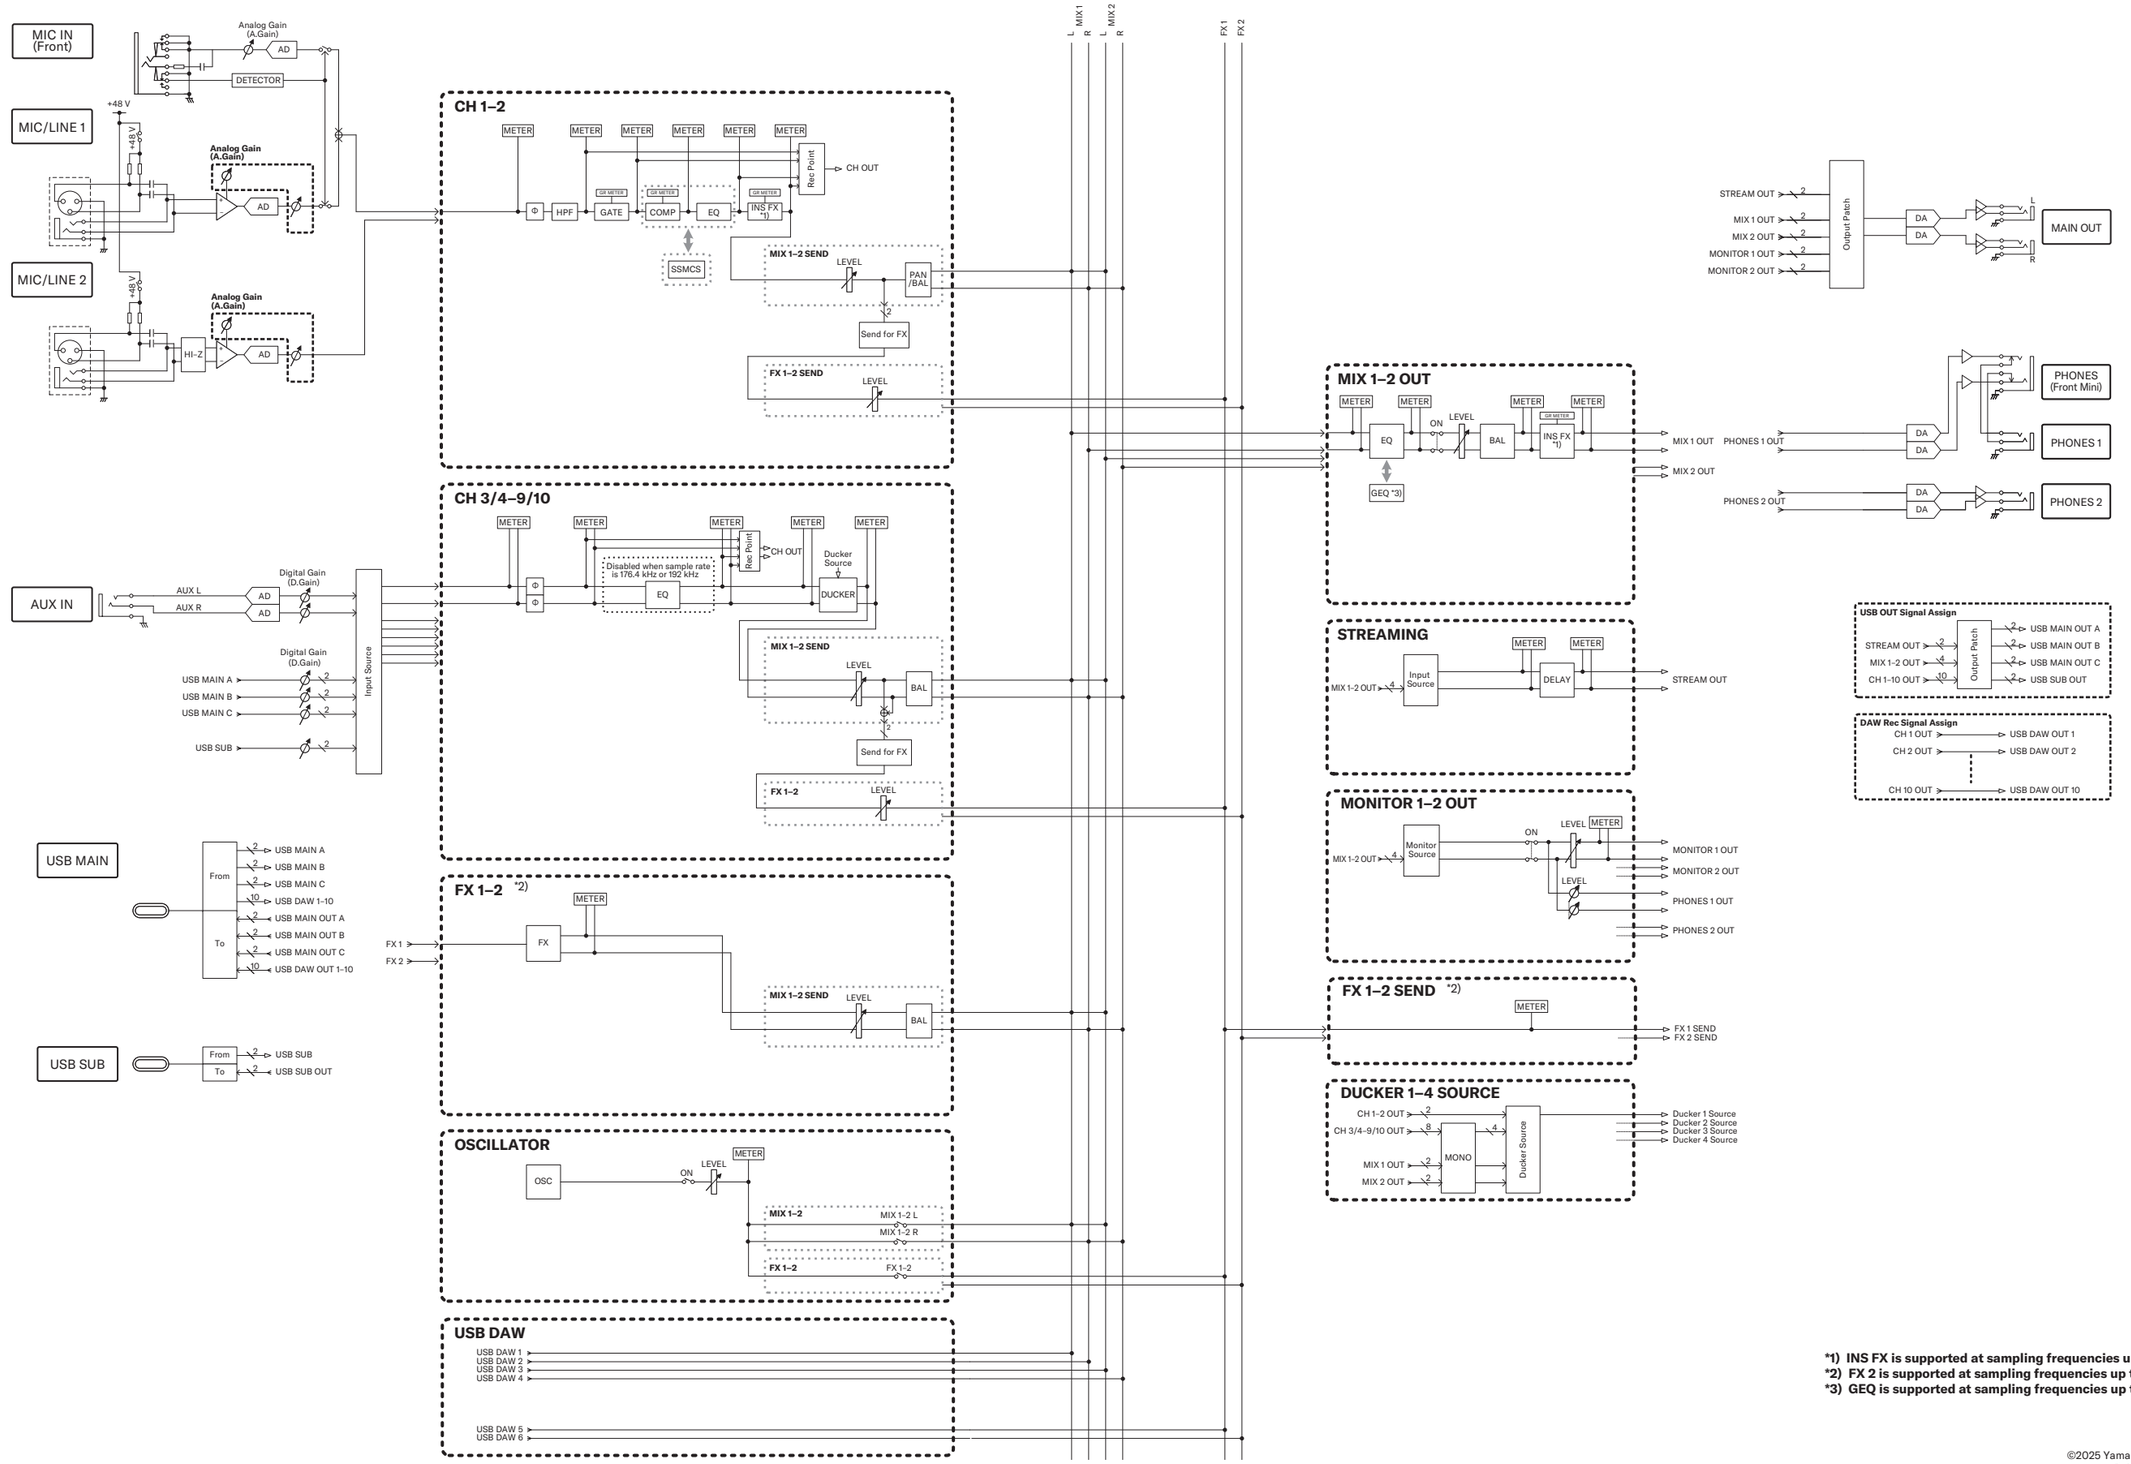

***1) INS FX is supported at sampling frequencies up to 96 kHz.**
***2) FX 2 is supported at sampling frequencies up to 96 kHz.**
***3) GEQ is supported at sampling frequencies up to 48 kHz.**

©2025 Yamaha Corporation
Published 11/2026
MWEM-D0